




Transmitter Module : TWS-BS6 (315 MHz)

- *Frequency Range: 315 MHz
- *Modulate Mode: ASK
- *Circuit Shape: SAW
- *Data Rate: 8kbps
- *Supply Voltage: 3~ 12 V
- *Power Supply and All Input / Output Pins: -0.3 to +12 V
- *Non-Operating Case Temperature: -20 to +85 ℃
- *Soldering Temperature (10 Seconds) : 230 ℃ (10 Seconds)



Absolute Maximum Ratings:

Rating	Value	Unit
Power Supply and All Input/ Output Pins	-0.3 to +12.0	V
Non-Operating Case Temperature	-20 to +85	℃
Soldering Temperature (10 seconds)	230	℃

Electrical Characteristics: T=25℃ , Vcc=3.6v, Freq=315MHz

Characteristic	Sym	Note	Min.	Typ.	Max.	Unit
Operating Frequency (200KHz)	Vcc			315.0		MHz
Data Rate	ASK				8K	Kbps
Transmitter Performance(OOK@2.4kbps)						
Peak Input Current,12 Vdc Supply	ITP				45	mA
Peak Output Power	PO			10		mW
Tum On/ Tum Off Time	T ON / T OFF				1	US
Power Supply Voltage Range	Vcc		3		12	VDC
Operating Ambient Temperature	TA		-20		+85	℃
Tx Antenna Out (3V) +2.4dB	Vcc					mA



Application Note:




pin 1 : GND
pin 2 : Data in
pin 3 : VCC
pin 4 : ANT

Application Note:

TWS-BS UNIT:mm

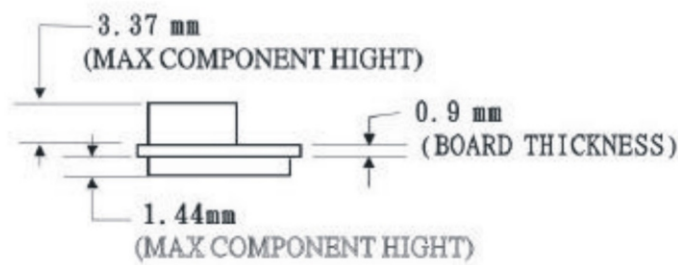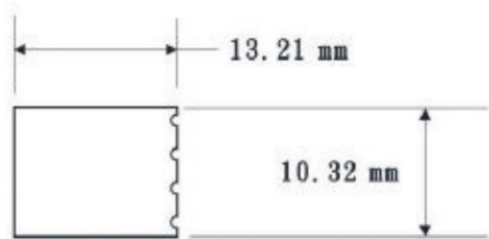

圖路電範示

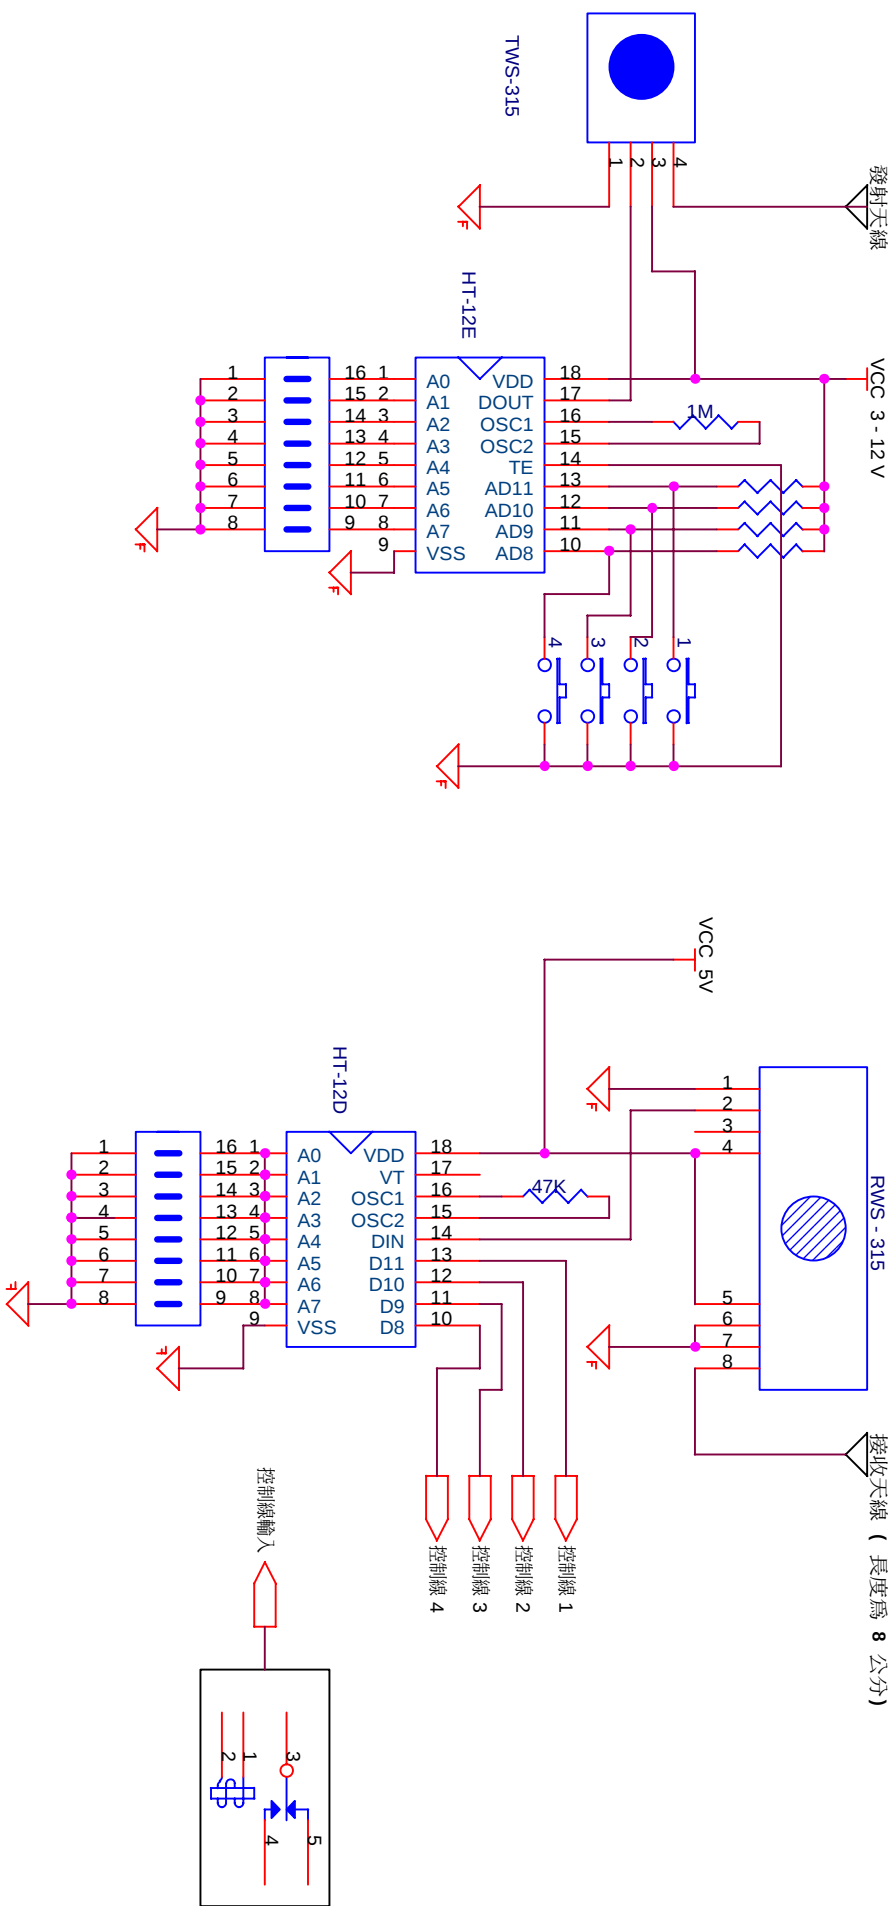

				A
Title				
<Title>				
Size	Document Number			Rev
A	<Doc>			<RevCode>
Date:	星期四, 八月 30, 2001	Sheet	1	of 1