


**Panasonic**  
ideas for life

**Highest sensitivity  
LED operate current:  
typical 0.31 A**

**HS PhotoMOS  
(AQV234)**

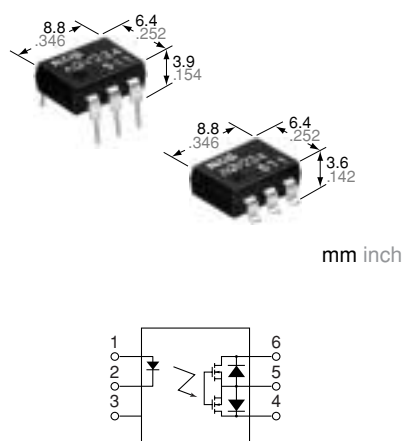

## FEATURES

1. High sensitivity type  
LED operate current: typical 0.31 mA
2. Low-level off state leakage current  
(Typical 1  $\mu$ A at 400 V load voltage)
3. Eliminates the need for a power supply to drive the power MOSFET
4. Low thermal electromotive force  
(Approx. 1  $\mu$ V)
5. Extremely low closed-circuit offset voltages to enable control of small analog signals without distortion
6. Eliminates the need for a counter electromotive force protection diode in the drive circuits on the input side

7. Stable on resistance to help simplify circuit design
8. Surface-mount model available

## TYPICAL APPLICATIONS

1. High-speed inspection machines
  - Scanner
  - IC checker
  - Board tester
2. Telephone and data communication equipment

## TYPES

Type	Output rating*		Part No.				Packing quantity	
			Through hole terminal	Surface-mount terminal				
	Load voltage	Load current	Tube packing style		Tape and reel packing style		Tube	Tape and reel
					Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side		
AC/DC type	400 V	120 mA	AQV234	AQV234A	AQV234AX	AQV234AZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	1,000 pcs.

\*Indicate the peak AC and DC values.

Note: For space reasons, the SMD terminal shape indicator "A" and the package type indicator "X" and "Z" are omitted from the seal.

## RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV234(A)	Remarks
Input	LED forward current	I <sub>F</sub>		50 mA	
	LED reverse voltage	V <sub>R</sub>		5 V	
	Peak forward current	I <sub>FP</sub>		1 A	f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>		75 mW	
Output	Load voltage (Peak AC)	V <sub>L</sub>		400 V	
	Continuous load current	I <sub>L</sub>	A	0.12 A	A connection: Peak AC, DC B, C connection: DC
			B	0.13 A	
			C	0.15 A	
	Peak load current	I <sub>peak</sub>		0.3 A	A connection: 100 ms (1 shot), V <sub>L</sub> = DC
	Power dissipation	P <sub>out</sub>		500 mW	
Total power dissipation		P <sub>T</sub>		550 mW	
I/O isolation voltage		V <sub>iso</sub>		1,500 V AC	
Temperature limits	Operating	T <sub>opr</sub>		−40°C to +85°C −40°F to +185°F	Non-condensing at low temperature
	Storage	T <sub>stg</sub>		−40°C to +100°C −40°F to +212°F	

# HS PhotoMOS (AQV234)


## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	Type of connection	AQV234(A)	Remarks	
Input	LED operate current	Typical	I <sub>Fon</sub>	—	0.31 mA	$\Delta I_F/\Delta t \geq \text{Min. } 100 \mu\text{A/s}$ I <sub>L</sub> = Max.	
		Maximum			0.5 mA		
	LED turn off current	Minimum	I <sub>Foff</sub>	—	0.1 mA	$\Delta I_F/\Delta t \geq \text{Min. } 100 \mu\text{A/s}$ I <sub>L</sub> = Max.	
		Typical			0.29 mA		
	LED dropout voltage	Typical	V <sub>F</sub>	—	1.25 V (1.1 V at I <sub>F</sub> = 2 mA)	I <sub>F</sub> = 50 mA	
		Maximum			1.5 V		
Output	On resistance	Typical	R <sub>On</sub>	A	30 Ω	I <sub>F</sub> = 2 mA I <sub>L</sub> = Max. Within 1 s on time	
		Maximum			50 Ω		
		Typical	R <sub>On</sub>	B	22.5 Ω	I <sub>F</sub> = 2 mA I <sub>L</sub> = Max. Within 1 s on time	
		Maximum			25 Ω		
		Typical	R <sub>On</sub>	C	11.3 Ω	I <sub>F</sub> = 2 mA I <sub>L</sub> = Max. Within 1 s on time	
		Maximum			12.5 Ω		
	Off state leakage current		Maximum	—	—	1 μA	I <sub>F</sub> = 0 mA V <sub>L</sub> = Max.
	Transistor characteristics	Switching speed	Turn on time*	Typical	T <sub>on</sub>	—	0.89 ms
Maximum				2 ms			
Turn off time*			Typical	T <sub>off</sub>	—	0.22 ms	I <sub>F</sub> = 2 mA I <sub>L</sub> = Max.
			Maximum			1 ms	
I/O capacitance		Typical	C <sub>iso</sub>	—	0.8 pF	f = 1 MHz V <sub>B</sub> = 0 V	
		Maximum			1.5 pF		
Initial I/O isolation resistance		Minimum	R <sub>iso</sub>	—	1,000 MΩ	500 V DC	

F = 2mA.


Note: Recommendable LED forward current I

\*Turn on/Turn off time

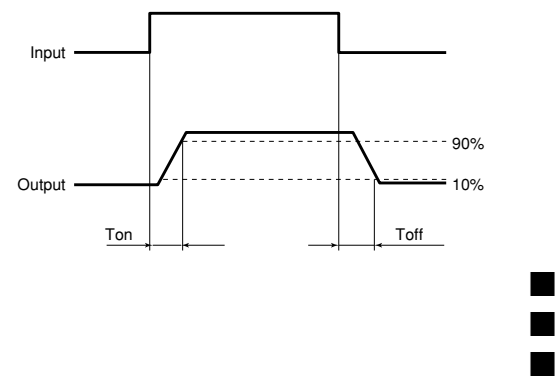


## REFERENCE DATA


1. Load current vs. ambient temperature characteristics  
Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F  
Type of connection: A



2. On resistance vs. ambient temperature characteristics  
Measured portion: between terminals 4 and 6;  
LED current: 2 mA; Load voltage: 400 V (DC);  
Continuous load current: 120 mA (DC)




3. Turn on time vs. ambient temperature characteristics  
LED current: 2 mA;  
Load voltage: 400 V (DC);  
Continuous load current: 120 mA (DC)




## 4. Turn off time vs. ambient temperature characteristics

LED current: 2 mA; Load voltage: 400 V (DC);  
Continuous load current: 120 mA (DC)




## 5. LED operate current vs. ambient temperature characteristics

Load voltage: 400 V (DC);  
Continuous load current: 120 mA (DC)

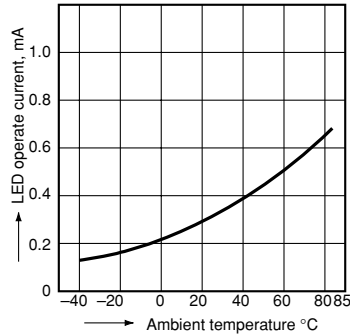


## 6. LED turn off current vs. ambient temperature characteristics

Load voltage: 400 V (DC);  
Continuous load current: 120 mA (DC)

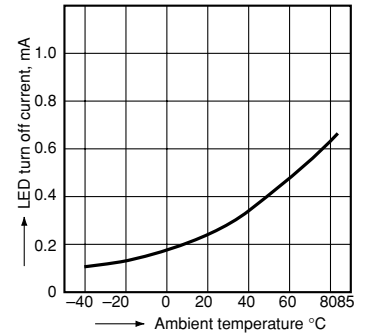


## 7. LED dropout voltage vs. ambient temperature characteristics

LED current: 2 to 50 mA




## 8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;  
Ambient temperature: 25°C 77°F




## 9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6;  
Ambient temperature: 25°C 77°F

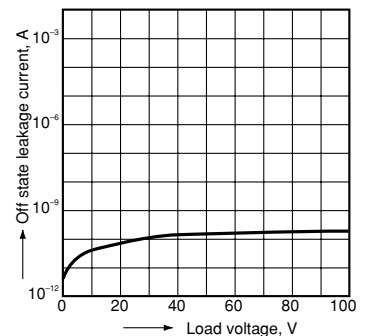


## 10. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;  
Load voltage: 400 V (DC); Continuous load current:  
120 mA (DC); Ambient temperature: 25°C 77°F



## 11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;  
Load voltage: 400 V (DC); Continuous load current:  
120 mA (DC); Ambient temperature: 25°C 77°F



## 12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

